


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H05B 41/29, 41/04</b>	<b>A1</b>	(11) International Publication Number: <b>WO 95/28071</b> (43) International Publication Date: 19 October 1995 (19.10.95)
(21) International Application Number: PCT/IB95/00197 (22) International Filing Date: 23 March 1995 (23.03.95) (30) Priority Data: 94200930.9      6 April 1994 (06.04.94)      EP (34) Countries for which the regional or international application was filed:      NL et al. (71) Applicant: PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (71) Applicant (for SE only): PHILIPS NORDEN AB [SE/SE]; Kottbygatan 5, Kista, S-164 85 Stockholm (SE). (72) Inventors: BLOM, Anton, Cornelis; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). SLEGGERS, Frans; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL). (74) Agent: DUSSELDORP, Jan, Charles; Internationaal Octrooibureau B.V., P.O. Box 220, NL-5600 AE Eindhoven (NL).		(81) Designated States: CA, JP, KR, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  Published With international search report.

(54) Title: CIRCUIT ARRANGEMENT

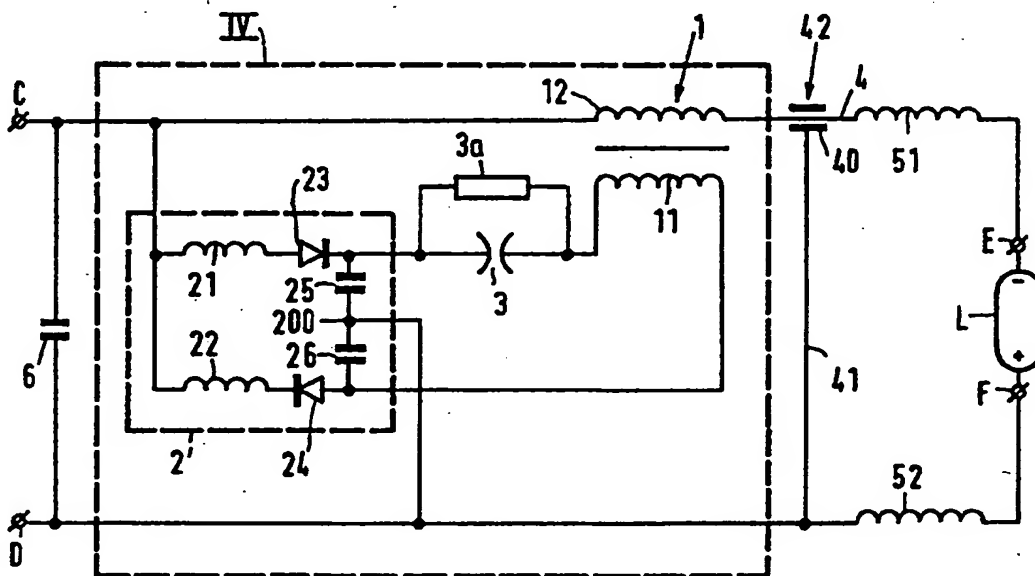

(57) Abstract

The invention relates to a circuit arrangement for igniting a high-pressure discharge lamp (L), provided with input terminals (C, D) for connecting a supply source; a pulse-generating circuit (IV) with a natural frequency and provided with a voltage-dependent breakdown element (3); a pulse transformer (1); and an electrical connection between a secondary winding (12) of the pulse transformer and lamp connection terminals (E, F). According to the invention, the secondary winding and the lamp connection terminals form part of a filter whose tuning is chosen in relation to the natural frequency of the pulse-generating circuit.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

# Circuit arrangement.

The invention relates to a circuit arrangement for igniting a high-pressure discharge lamp, provided with

- input terminals for connecting a supply source;
- a pulse-generating circuit with a natural frequency and provided with a voltage-dependent breakdown element;
- 5 - a pulse transformer; and
- an electrical connection between a secondary winding of the pulse transformer and lamp connection terminals.

A circuit arrangement of the kind mentioned in the opening paragraph is  
10 known from EP-A-0 398 432 (PHN 12.932 = US-A-5,087,859).

The known circuit arrangement forms part of a circuit for operating and igniting a high-pressure discharge lamp as part of a projection TV system. Special requirements as to dimensions and luminous efficacy are imposed on a lamp if it is to be suitable for such an application. This results in that an ignition pulse of more than 10 kV,  
15 often even more than 20 kV, is required for reliable ignition of the lamp. A further requirement imposed on the ignition circuit is that an extinguished lamp which has not or hardly cooled down must be capable of quick re-ignition. Such hot re-ignition requires a re-ignition pulse of a level corresponding to that of the ignition pulse.

In the known circuit arrangement, the voltage pulse generated in the pulse  
20 transformer is applied directly from the secondary winding to the lamp connection terminals.

The known circuit arrangement forms part of a switch mode power supply provided with a commutator circuit in which several semiconductor switches are periodically switched into the conductive and non-conductive state during (lamp) operation. It was found in practice that lamp ignition by means of the known circuit arrangement may cause one or  
25 several of the semiconductor switches of the switch mode power supply to become defective. This is a problem. The use of a decoupling capacitor between the input terminals for the connection of a supply source does not provide a substantial improvement here.

The invention has for its object to provide a solution to the problem described above of defective semiconductor switches in the switch mode power supply during

ignition of the connected lamp.

According to the invention, this object is achieved in that a circuit arrangement of the kind mentioned in the opening paragraph is characterized in that the secondary winding of the pulse transformer and the lamp connection terminals form part of a pass filter with a tuning chosen in relation to the natural frequency of the pulse generating circuit.

The inventors have found that especially signals of very high frequency may arise the moment breakdown occurs in the lamp, which high-frequency signals cause the semiconductor switches present in the circuit arrangement to become defective. Thanks to the measure according to the invention, said signals of very high frequency are damped to a considerable degree.

The circuit arrangement according to the invention has the advantage that the circuit formed by the secondary winding of the pulse transformer and the lamp connection terminals constitutes a pass filter by which a pulse generated in the pulse generating circuit is converted into an ignition pulse across the connected lamp with only slight losses, while signals with other frequencies are strongly damped in the tuned circuit. The tuning may be chosen to be a harmonic frequency of the natural frequency of the pulse-generating circuit. In an advantageous embodiment, the tuning is chosen to be at or adjacent the natural frequency itself. It was surprisingly found that a favourable result is achieved with such a tuning both as to an efficient coupling-in of the ignition pulse and as to the prevention of semiconductor switches becoming defective.

It was found to be advantageous that additional inductive means are present in the pass filter between the secondary winding and at least one of the lamp connection terminals. This was found to be effective in counteracting defects in semiconductor switching elements during lamp breakdown where the additional inductive means were also included in the lamp operating circuit. During lamp operation, these additional inductive means represent a negligible impedance and accordingly do not give rise to any appreciable dissipation. This is in contrast to resistive means which are suitable in principle for being used as elements of the low-pass filter. The measure is particularly effective when the additional inductive means are provided symmetrically as regards their values relative to the lamp connection terminals.

To counteract the occurrence of interference fields owing to the pulse generation, it is advisable that the conductor from the secondary winding of the pulse transformer to one of the lamp connection terminals is constructed as a coaxial conductor.

Preferably, the sheath of the coaxial conductor is in direct electrical contact with another one of the lamp connection terminals. The value of the capacitance formed by the coaxial conductor is one of the factors determining the tuning of the pass filter. In addition, the pass filter in conjunction with the pulse-generating circuit is given a characteristic of a band-pass filter thereby.

The above and further aspects of the invention will be described in more detail with reference to a drawing of an embodiment, in which

Fig. 1 is a diagram of a circuit for igniting and operating a lamp of a TV system,

Fig. 2 is a portion of Fig. 1 which serves to ignite the lamp, and

Fig. 3 shows a voltage generated by the circuit arrangement of Figs. 1 and 2.

In Fig. 1, A, B are connection terminals for connection to a supply voltage source, for example, a public mains of 220 V, 50 Hz. Rectification of the supply voltage takes place in I. Circuit I may also comprise provisions for preventing mains voltage pollution owing to the operation of the circuit arrangement.

Block II forms a switch mode power supply by which a commutator circuit III is supplied. The commutator circuit III is connected as a supply source to a lamp circuit V via input terminals C, D of the lamp circuit. The lamp circuit V comprises a pulse-generating circuit IV and lamp connection terminals E, F between which a lamp L is connected. Fig. 2 shows the lamp circuit V in more detail.

In Fig. 2, input terminal C is connected to a pulse transformer 1. A primary winding 11 of the transformer 1 is connected in series with a voltage-dependent breakdown element 3 between input terminals C and D via a voltage-raising network 2. A secondary winding 12 of transformer 1 is connected at one side directly to input terminal C. At the other side, the secondary winding 12 is connected via a coaxial conductor 4 to a self-induction 51, which in its turn is connected to lamp connection terminal E. Sheath 40 of the coaxial conductor 4 is directly connected through a conductor 41 to input terminal D, and via a self-induction 52 to a lamp connection terminal F. The capacitance formed by the coaxial conductor is indicated with 42.

Transformer 1, voltage-raising circuit 2 and voltage-dependent breakdown element 3, shunted by a leakage resistance 3a, together form a pulse generating circuit IV with a natural frequency. The self-inductances 51 and 52 form additional inductive means which together with capacitance 42 and secondary winding 12 form a transmission filter of which also the

lamp connection terminals E and F form part. The tuning of the pass filter is chosen in relation to the natural frequency of the pulse-generating circuit.

In a practical realisation of an embodiment as described above, the circuit arrangement is suitable for igniting and operating a 100 W Philips high-pressure mercury lamp of the CSL-R type. The rated lamp voltage is 90 V and the rated lamp current frequency is 90 Hz.

Sub-circuits I and II are an input filter combined with a rectifier bridge and an up-converter combined with a down-converter, respectively, familiar from Philips electronic ballast type EMC 150.

The commutator circuit III is constructed as a bridge circuit, also in accordance with the known Philips electronic ballast type EMC 150. A no-load voltage of approximately 300 V is present at the connection terminals C, D of the commutator when a 220 V supply source is connected to terminals A, B.

The voltage-raising circuit comprises two inductive elements which in the embodiment described are wound on a shared ferrite core and over which the no-load voltage of approximately 300 V is amplified to 1100 V. It is alternatively possible for the inductive elements to be provided each with its own core so as to form separate elements. The voltage-dependent breakdown element is a spark gap, make Siemens, with a breakdown voltage of 800 V, which is shunted by a leakage resistance 3a of 33 kohms to achieve a good operation of the voltage-raising circuit. This in fact achieves that the voltage across the capacitors of the voltage-raising circuit is well defined. This shunt resistance is also desirable for reasons of electrical handling safety. Also for safety, the connection between the capacitors of the voltage-raising circuit and input terminal D comprises a PTC resistor (not shown). A decoupling capacitor 6 of 1 nF is in addition connected between the input terminals C and D. The capacitors 25, 26 each have a value of 68 nF, and the self-inductances 21, 22 of 24 mH. The pulse transformer is a high-voltage transformer with a ferrite rod core, a primary winding of 4 turns and a secondary winding of 11 sections of 14 turns each. Both the primary winding and the secondary winding are formed from wire of 400  $\mu$ m diameter. The coupling between primary and secondary windings here is 0.5. The transformer supplies an ignition pulse of at least 15 kV and at most 25 kV. The pulse thus generated has a width of approximately 300 ns measured at a level of 13.5 kV. The additional inductive means, consisting of two self-inductances, are formed from wire of 0.8 mm as a single layer of 45 turns around a ferrite rod core. Each self-induction is 54  $\mu$ H. The capacitance formed by the coaxial conductor has a value of 12 pF. The self-inductance of the secondary winding of the

pulse transformer is 1.1 mH. The total of the capacitances of the coaxial conductor, the secondary pulse transformer winding, and further parasitic capacitances present is approximately 20 pF. Said parasitic capacitances are formed *inter alia* by the lamp which has not yet ignited. The filter formed by the secondary winding, additional inductive means, lamp connection points and the capacitance mainly caused by the coaxial conductor is thus tuned to a frequency just above 1 MHz. Together with the pulse-generating circuit, which has a natural frequency of 1 MHz, the filter constitutes a band-pass filter. A generated ignition pulse is shown in Fig. 3. Time  $t$  is plotted on the horizontal axis in units of 500 ns per graduation. Voltage  $V$  is plotted on the vertical axis in units of 5 kV per graduation.

It is apparent from the Figure that the generated pulse has a width  $b$  of 300 ns at a voltage level of 13.5 kV.

When the lamp breaks down as a result of the generated pulse, a comparatively high breakdown current will flow through the lamp for a few nanoseconds immediately after breakdown. The additional inductive means 51, 52 present limit this breakdown current to approximately 8 A. This breakdown current is mainly supplied by the charged capacitances of the filter, in particular the capacitance formed by the coaxial conductor. Then the current supply is taken over by the commutator, and the run-up phase of the lamp commences, during which a stable discharge arc is gradually developed. During the run-up, a current of approximately 2 A initially flows through the lamp, which is reduced to 1 A when the stable discharge condition is reached.

CLAIMS:

1. A circuit arrangement for igniting a high-pressure discharge lamp,  
provided with
  - input terminals for connecting a supply source;
  - a pulse-generating circuit with a natural frequency and provided with a voltage-  
5 dependent breakdown element;
  - a pulse transformer; and
  - an electrical connection between a secondary winding of the pulse transformer  
and lamp connection terminals,characterized in that the secondary winding of the pulse transformer and the lamp connection  
10 terminals form part of a pass filter with a tuning chosen in relation to the natural frequency  
of the pulse generating circuit.
2. A circuit arrangement as claimed in Claim 1, characterized in that the  
tuning of the pass filter is chosen to be at or adjacent the natural frequency itself.
3. A circuit arrangement as claimed in Claim 1 or 2, characterized in that  
15 additional inductive means are present in the pass filter between the secondary winding and  
at least one of the lamp connection terminals.
4. A circuit arrangement as claimed in Claim 3, characterized in that the  
additional inductive means are provided symmetrically as regards their values relative to the  
lamp connection terminals.
- 20 5. A circuit arrangement as claimed in Claim 1, 2, 3 or 4, characterized in  
that a conductor from the secondary winding of the pulse transformer to one of the lamp  
connection terminals is constructed as a coaxial conductor.
6. A circuit arrangement as claimed in Claim 5, characterized in that a  
sheath of the coaxial conductor is in direct electrical contact with another one of the lamp  
25 connection terminals.



1/2

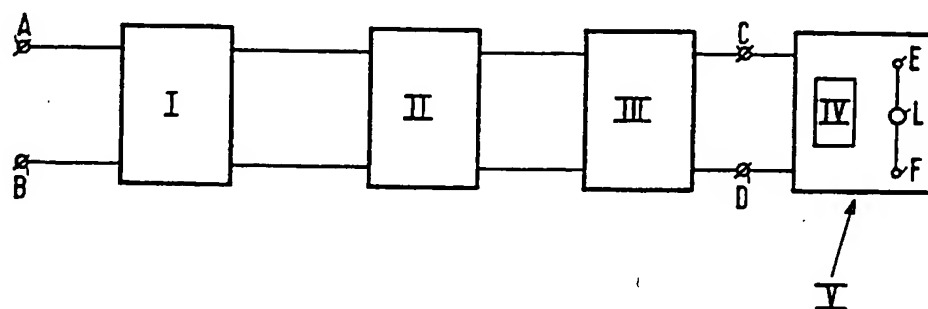


FIG.1

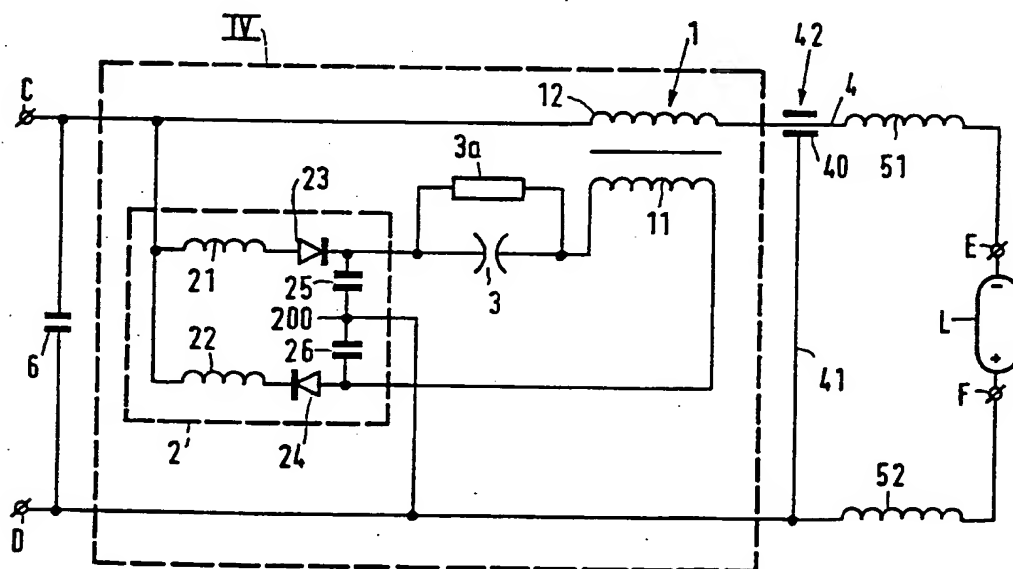


FIG.2

2/2

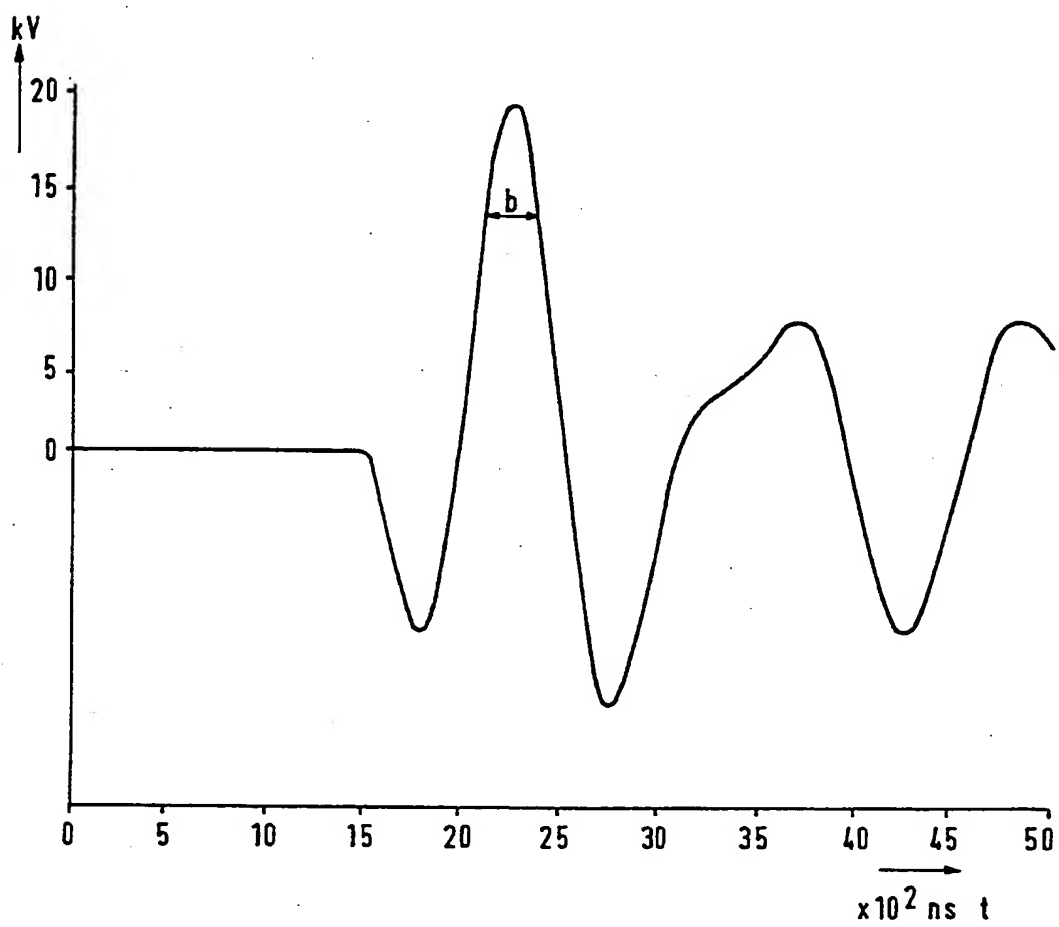


FIG.3

## INTERNATIONAL SEARCH REPORT

Ir national application No.

PCT/IB 95/00197

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H05B 41/29, H05B 41/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H05B, H01J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## CLAIMS, WPI

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0436985 A1 (N.V. PHILIPS' GLOEILAMPENFABRIEKEN), 17 July 1991 (17.07.91), figure 1, abstract  --	1-6
A	US 5087859 A (H.J. BLANKERS), 11 February 1992 (11.02.92), column 3, line 42 - column 4, line 22, figure 2  --	1-6
A	US 4749914 A (Z. FEHER ET AL), 7 June 1988 (07.06.88), figure 3, abstract  -- -----	1-6

☐ Further documents are listed in the continuation of Box C.
 ☒ See patent family annex.

<ul style="list-style-type: none"> <li>Special categories of cited documents:</li> <li>"A" document defining the general state of the art which is not considered to be of particular relevance</li> <li>"E" earlier document but published on or after the international filing date</li> <li>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</li> <li>"O" document referring to an oral disclosure, use, exhibition or other means</li> <li>"P" document published prior to the international filing date but later than the priority date claimed</li> </ul>	<ul style="list-style-type: none"> <li>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</li> <li>"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</li> <li>"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</li> <li>"&amp;" document member of the same patent family</li> </ul>
---	--

Date of the actual completion of the international search	Date of mailing of the international search report
27 June 1995	31-07- 1995
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86	Authorized officer Åsa Fransson Telephone No. +46 8 782 25 00

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

29/05/95

International application No.  
PCT/IB 95/00197

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A1- 0436985	17/07/91	DE-D- 59005616	00/00/00
		DE-D,T- 69008836	03/11/94
		EP-A,B- 0431116	12/06/91
		JP-A- 4212291	03/08/92
		NL-A- 9000077	01/08/91
		US-A- 5084655	28/01/92
-----			
US-A- 5087859	11/02/92	CN-A- 1047429	28/11/90
		EP-A- 0398432	22/11/90
		JP-A- 3004491	10/01/91
-----			
US-A- 4749914	07/06/88	BE-A,A- 904172	29/05/86
		CH-A,B- 668879	31/01/89
		DE-A- 3603474	07/08/86
		FR-A,B- 2577100	08/08/86
		GB-A,B- 2172451	17/09/86
		JP-A- 61245496	31/10/86
		NL-A- 8600272	01/09/86
		SE-A- 8600508	08/08/86